

MIDI VAL[®] BLADE TYPE FUSE




MidiVAL[®] fuses are compliant with ISO 8820-5 Standard, applicable to automotive bolt-on Fuses. They allow space reduction compared to MegaVAL[®] for high current wiring protection. The operating features are characterized by strong time delay characteristics.

MidiVAL[®] are made of Zinc alloy, a good choice to avoid high temperatures inside the box..

Breaking capacity: 2000[A]
Voltage rating: 32[Vdc]
Ambient temperature: -40°C to +125°C



MTA/ISO MidiVAL [®] operating time limits		
% I _N	min [s]	max [s]
100	360000	-
110	14400	-
150	90	3600
200	3	100
300	0,3	3
500	0,1	1

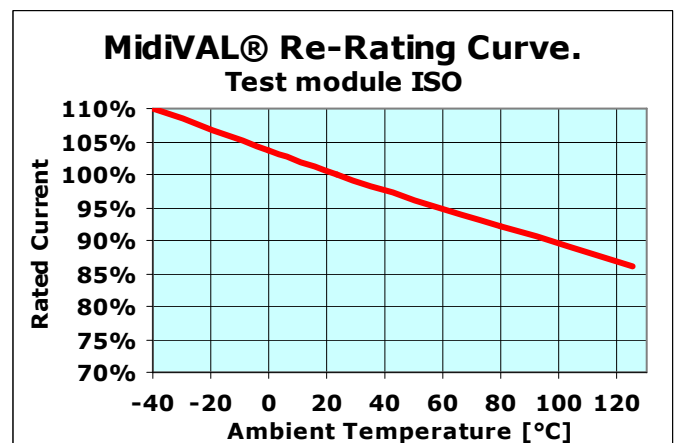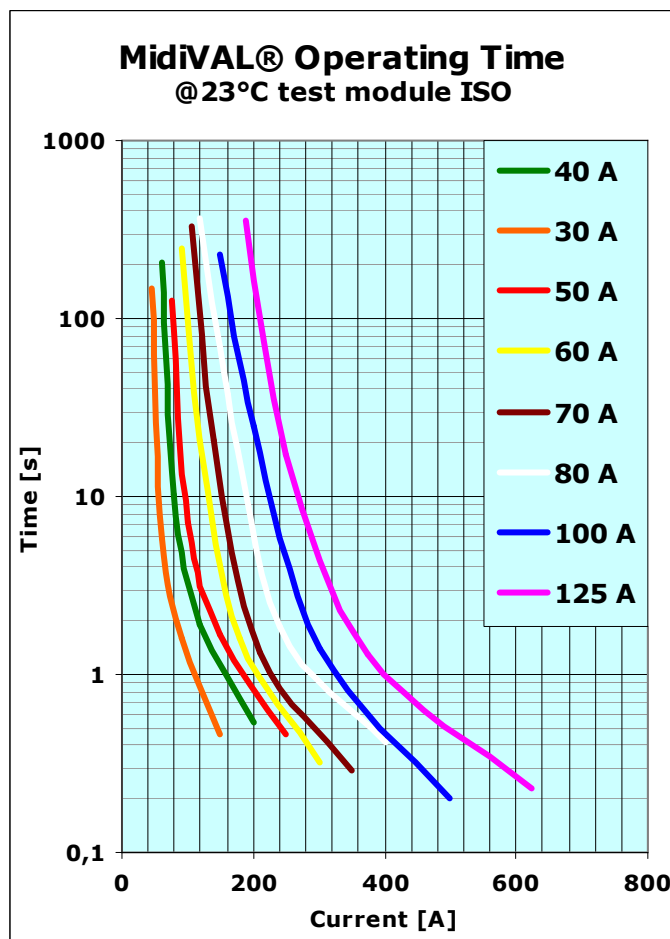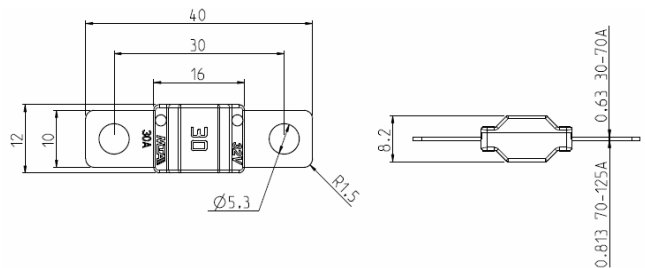

CURRENT RATING [A]	VOLTAGE DROP @ current rating [mV]	CABLE SIZE [mm ²]	I ² t
30	80,5	2,5	10523
40	70,9	4,0	18929
50	74,2	6,0	26320
60	60,5	10,0	30804
70	68,2		26728
80	66,0	16,0	56298
100	63,7		34524
125	62,0	25,0	48601