


3-pole Plug-In Connector System according to DIN 9680

3-pole Socket

Ease of assembly due to one-piece threaded housing with ribbed surface

Continuous sealing surface ensures protection level IP54 when cover is closed or plug is inserted

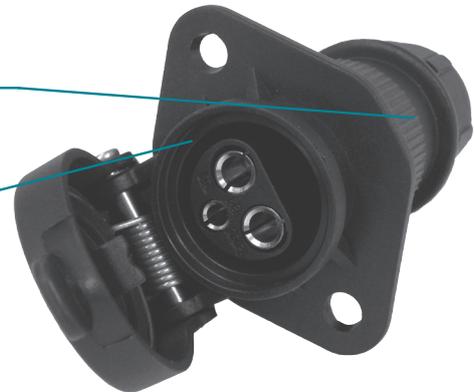


Version with rubber seal



Version with cap nut



3-pole Plug

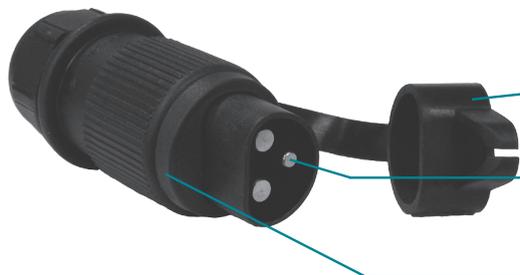

Protective cap

Rounded contacts for optimum connection characteristics

Seal ensures protection level IP 54 when plugged into socket

Plugged-in Connection

Cap nut seals the housing and cable to IP 54 and provides strain relief for the cable

